

TERRA AQUA RENO MATTRESS PVC COATED

General Description:

The Terra Aqua PVC coated Reno mattress is a mattress shaped container manufactured from heavily galvanized steel wire with an additional PVC coated jacket to form a flexible and effective surface protection to defend against erosion and scouring. The flexible wire mesh will accommodate significant deformation without failure. The base and sides of the Reno Mattress are made of a single sheet of wire mesh (main panel). Partition panels (diaphragms) are made of the same wire mesh as the main panel and are attached to the base of the main panel dividing the Reno Mattress into 3 foot cells. The lid is formed either by a single sheet or in rolls of a specified length from the same wire as is in the main panel.

Mesh:

The mesh shall be woven into a hexagonal pattern with the joints formed by twisting each pair of wires through three and a half turns or a complete double twist. Because of this appearance, the joints are often double twisted. The size of the mesh conforms to the specification issued by the manufacturing facility and shall be uniform in opening size where the smallest dimension shall be 6cm minimum but not larger than 8 cm.

Wire:

All wire used in the fabrication of the Reno Mattress and in the lacing operations shall conform to Federal Specification QQ-W-461H, Class 3, Finish 5, soft, and have an average tensile strength in accordance with the current ASTM A 641, Table 2, before PVC coating and fabrication of the netting. The nominal diameter of the wire used in the fabrication of the netting shall be 0.0866 inches minimum, subject to diameter tolerance in accordance with the current ASTM A 641, Table 3.

Elongation of Wire:

Tests shall be conducted on the wire before coating with PVC and fabrication on the mattresses on a sample 12 inches long. Elongation shall not be less than 12%.

Zinc Coating (Galvanized):

All wire used in the fabricating and construction of the gabions shall be galvanized according to ASTM A 641, Table 1. The minimum weight of the zinc coating shall be according to the table following when tested in accordance with ASTM A 90.

<i>Description</i>	<i>Nominal Diameter of Wire</i>	<i>Minimum Weight of Coating</i>
Mesh and Lacing	0.0866 inches (2.2mm) minimum	0.80 ozs / sq ft
Selvedge	0.106 inches (2.7mm) minimum	0.80 ozs / sq ft

Adhesion of the zinc coating to the wire shall be capable of being wrapped in a close helix at a rate not exceeding 15 turns per minute around a cylindrical steel mandrel having a diameter 3 times the nominal wire diameter being tested. After the wrap test is completed, the wire shall not exhibit any cracking or flaking of the zinc coating to such an extent that any zinc can be removed by rubbing with bare fingers.

Selvedges:

All edges of the Reno Mattress including end panels and the diaphragms, shall be mechanically selvedged in such a way as to prevent unraveling of the mesh and to develop the full strength of the mesh. The wire used for the selvedge shall have a diameter greater than that of the wire used to form the mesh.

Lacing Wire:

Sufficient lacing and connecting wire shall be supplied with the mattress for all wiring operations. The nominal diameter of lacing wire shall be 0.0866 inches minimum.

Alternative wire fasteners shall be ASTM approved wire fasteners used in lieu of lacing wire..

PVC Coating:

PVC (Poly Vinyl Chloride) Coating. The coating shall be gray in color and shall have a nominal thickness of 0.0216 inches but not less than 0.015 inches in thickness. The protective PVC plastic shall be suitable to resist deleterious effects from exposure to light, immersion in salt or polluted water and shall not show any material difference in its initial compound properties. The PVC compound shall also be resistant to attack from acids and resistant to abrasion.

A. Initial properties of the PVC coating shall meet the following requirements:

A.1 Specific Gravity:

According to ASTM D-2287 and ASTM D-792; in the range of 1.30 to 1.34.

A.2 Tensile Strength:

According to ASTM D-412; not less than 2980 psi.

A.3 Modulus of Elasticity:

According to ASTM D-412; not less than 2700 psi at 100% strain.

A.4 Resistance to Abrasion:

According to ASTM 1242; weight loss < 12% (Method B).

A.5 Brittleness Temperature:

According to ASTM D-746, Procedure A; shall be at least 8.3 degrees centigrade below the minimum temperature at which the gabions will be handled or placed but not higher than 9.4 degrees centigrade.

A.6 Hardness:

According to ASTM d-2240; shall be between 50 and 60 Shore D when tested.

A.7 Creeping Corrosion:

Maximum corrosion penetration to the wire from a square cut end section shall not be more than 25mm when the specimen has been immersed for 2000 hours in a 50% SOLUTION HCl (hydrochloric acid 12 Be).

B. Variation of the initial properties will be allowed, as specified following, when the specimen is submitted to the following accelerated aging tests:

B.1 Accelerated Aging Tests

B1.1 Salt Spray Test:

According to ASTM B-117
Period of test 3000 hours.

B1.2 Exposure to ultraviolet rays:

Page 3

According to ASTM D-1499 and ASTM G-23 (Apparatus Type E).
Period of Test = 3000 hours at 63 degrees centigrade.

B1.3 Exposure to high temperatures:

Testing period: 240 hours at 105 degrees centigrade, when tested
in accordance with ASTM D-1203 and ASTM D-2287.

* After the above tests have been performed, the PVC compound shall exhibit the following properties.

C. Properties after Aging Tests:

C.1 Appearance:

The vinyl coating shall not crack, blister or split and shall not show any remarkable change in color.

C.2 Specific Gravity:

Shall not show change higher than 6% of its initial value.

C.3 Durometer Hardness:

Shall not show change higher than 10% of its initial value.

C.4 Tensile Strength:

Shall not show change higher than 25% of its initial value.

C.5 Elongation:

Shall not show change higher than 25% of its initial value.

C.6 Modulus of Elasticity:

Shall not show change higher than 25% of its initial value.


C.7 Resistance to Abrasion:

Shall not show change higher than 10% of its initial value.

C.8 Brittleness Temperature:

Cold Bend Temperature - shall not be higher than -20 degrees centigrade.

Cold Flex Temperature - shall not be higher than +18 degrees centigrade.

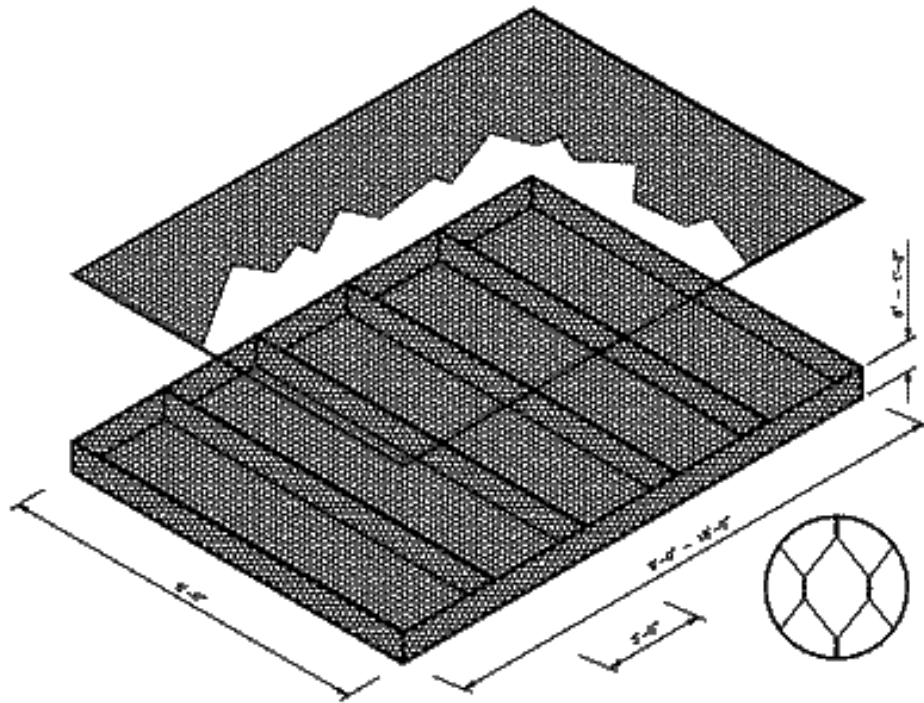

Terra Aqua Reno Mattress Standard Sizes:

<i>Reno mattress unit size</i>	<i>Capacity cubic yard</i>	<i>No. of internal cells</i>
9'x6'x6"	1	3
12'x6'x6"	1.333	4
9'x6'x9"	1.5	3
12'x6'x9"	2	4
9'x6'x12"	2	3
12'x6'x12"	2.666	4

*Unit sizes are listed length x width x depth.

*Tolerances- All reno mattress dimensions shall be within a tolerance limit of plus or minus 5% of the manufacturers stated dimensions.

*Standard reno mattress units are available with unit or roll top lids.

Terra Aqua Reno Mattress Custom Jumbo Sizes:

Reno mattress lengths	Reno mattress widths	Reno mattress depths
15', 18', 21', 24', 27', 30'	3', 6'	6", 9", 1'

*Tolerances- All custom reno mattress dimensions shall be within a tolerance limit of plus or minus 5% of the manufacturers stated dimensions.

*Custom jumbo reno mattress units are available with unit or roll top lids.

Diaphragms:

According to engineering requirements the Terra Aqua Reno Mattress is designed to incorporate internal diaphragms to form cells having a nominal length of three feet. The internal diaphragms will prevent stone fill migration within the reno mattress.

Manufacturing Tolerances for Terra Aqua Reno Mattress:

A tolerance of $\pm 5\%$ on the width and on the length of the Reno Mattress and a tolerance of $\pm 10\%$ on the height within the manufacturers stated dimensions shall be permitted.

Stone Size:

The Terra Aqua Heavy Duty Reno Mattress was designed specifically to accommodate stone size of 3 to 6 inches (75-105mm) allowing for two layers of stone fill. Only hard durable stone shall be used as mattress fil.

Installation / Placement:

On channel slopes, the mattress shall be placed perpendicular to the flow of the channel with the length dimension of the reno mattress going up and down the slope. On the channel bed, the length dimension of the reno mattress shall be placed parallel to the flow, while the width of the reno mattress runs across the channel bed. An approved corner closure tool shall be used to adjoin adjacent mattresses to insure a tight, neat seam and minimize mattress wire joint deformation.

* Terra Aqua Gabions reserves the right to amend these specifications without notice.

Terra Aqua gabion material is manufactured according to ASTM A975-97 guidelines for double twisted hexagonal mesh gabions.

ASTM A975-97

TERRA AQUA GABIONS, INC.

1415 N. 32nd Street
Fort Smith AR 72904
800-736-9089

Distributed by: ASP Enterprises-STL: Phone: 800-869-9600, www.aspent.com; ASP Enterprises-KC: Phone 800-519-2304; ASP Enterprises-Omaha: Phone: 877-678-8027

Page 6



Mattress Specification (PVC)



Bowman
Construction
Supply Inc.



Quick
Supply Co.



Cascade
GEOSYNTHETICS

LOCATIONS & CONTACT INFO

ASP ENTERPRISES

aspent.com
salesasp@aspent.com

BOWMAN CONSTRUCTION SUPPLY

bowmanconstructionsupply.com
salesbcs@bowmanconstructionsupply.com

QUICK SUPPLY CO.

quicksupplyco.com
salesquick@quicksupplyco.com

CASCADE GEOSYNTHETICS

cascadegeos.com
salescascade@cascadegeos.com

St. Louis, MO 636.343.4357
Omaha, NE 402.861.8579
Kansas City, MO 816.554.1191
Wichita, KS 316.393.1554

Denver, CO 303.696.8960
Colorado Springs, CO 719.257.7840
Loveland, CO 970.535.0863

Des Moines, IA
515.289.1271

Portland, OR
971.339.1020

SOLUTIONS WE SUPPLY

GEOSYNTHETICS

Filter Fabrics

Stabilization Fabrics

Geogrids

- Road Grids
- Wall Grids
- Slope Stabilization

Specialty Fabrics

Composite Geomembranes

- GCLs, PVC, HDPE, LLDPE, EPDM, Granular Bentonite

SEDIMENT CONTROL

Inlet Protection

- Grated Inlet, Curb Inlet, Area Inlet Protection

Ditch Checks

- Triangle Silt Dike
- GeoRidge

Perimeter Protection

- High and Low-Porosity Silt Fence, Straw Wattles, Silt Socks
- Safety Fence

Flocculants & Water Treatment

- Polymer-Based & Natural Flocculants

Sediment Basin Skimmers

Dewatering Bags

Trackout Control

- FODS
- Rumble Grates

Turbidity Curtains

EROSION CONTROL

Basic Hydraulically Applied Mulches

- Wood
- Paper
- Blends
- Straw

High-Performance Hydraulically

Applied Products

- BFM
- FGM
- Additives & Tackifiers

Temporary Erosion Control Blankets

- Coir & Jute Mat/Nettings
- Short-Term ECBs
- Extended-Term ECBs

Permanent Erosion Control Blankets

- Turf Reinforcement Mats
- HP-TRMs
- Anchor Reinforced Vegetation System

Structural BMPs

- Transition Mats
- Geoweb Cellular Confinement
- Composite Vegetated Armor System
- Flex MSE Vegetated Wall System
- Articulated Concrete Block
- Gabions
- Grout-Filled Geotextile Mats

Vegetation Establishment

- Native Seed & Turf Seed
- Fertilizers
- Organic Soil Additives
- Stratavault Soil Cells

STORMWATER MANAGEMENT

Water Quality

- Inlet Filter Boxes
- Pre-Treatment Chamber
- Nutrient Separating Baffle Boxes
- High-Flow Biofiltration Media
- Hydrodynamic Separators
- Stratavault

Water Quantity

- Modular Underground Storage Systems
- Chamber Detention Systems

Drainage

- HDPE Swale Liner
- Pipe & Fittings
- Drainage Composites
- Strip Drain

Inlet Structures

- PVC
- Drain Basins, In-Line Drains
- Landscape

Permeable Pavers

- Permeable Articulating Concrete Block
- Grass Pavers
- Gravel Pavers
- Concrete Pavers

SPECIALTY

Natural & Synthetic Coir Fiber Logs

Vegetated Reinforced Soil Slopes

Soil Anchors

Root Barrier System

AquaBlok

Muscle Wall

We are full line distributors of construction materials for all project types. Contact us for assistance with a project. From specification and development to installation and completion, we're here to help with all of your site solution needs.

GEOSYNTHETICS | EROSION CONTROL | STORMWATER MANAGEMENT
SEDIMENT CONTROL | REVEGETATION & SOIL AMENDMENTS