

MATERIAL PROPERTY DATA SHEET




ShoreMax[®]

Permanent • Flexible • Transition Mat

DESCRIPTION

The Western Green ShoreMax Transition Mat shall be a resilient rubber mat with surface texture and multi-nib backing. It shall have a large hole drainage system with aperture openings approximately 1.25 in (3.2 cm) in diameter. ShoreMax mat is a transition mat used as bio-technical replacement for hard armor. ShoreMax mat is mechanically anchored and is a flexible matting that can be installed in transitional areas susceptible to soil scour. ShoreMax mat can provide erosion control in highly erosive areas, including shorelines, and can be used in conjunction with rolled erosion control products.

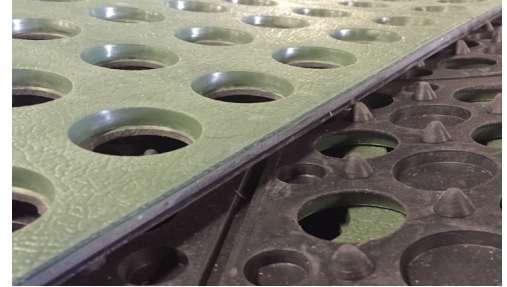

Material Content		
Matting	100% UV-stabilized natural rubber	2.00 lb/ft ² (10 kg/m ²)

Color Dark Green

Standard Roll Sizes		
Width ³	3 ft	(1.0 m)
Length	5 ft	(1.5 m)
Weight ± 10%	30 lb	(13.6 kg)
Area	1.67 SY	(1.39 m ²)

Approvals & Classification	
Classification	N/A
TTI Approvals	N/A
NTPEP Number	N/A

Disclaimer: The information contained herein may represent product index data, performance ratings, bench scale testing or other material utility quantifications. Each representation may have unique utility and limitations. Every effort has been made to ensure accuracy, however, no warranty is claimed and no liability shall be assumed by Western Green or its affiliates regarding the completeness, accuracy or fitness of these values for any particular application or interpretation. While testing methods are provided for reference, values shown may be derived from interpolation or adjustment to be representative of intended use. For further information, please feel free to contact Western Green.

©2022, Western Green is a registered trademark from Western Green. Certain products and/or applications described or illustrated herein are protected under one or more U.S. patents. Other U.S. patents are pending, and certain foreign patents and patent applications may also exist. Trademark rights also apply as indicated herein. Final determination of the suitability of any information or material for the use contemplated, and its manner of use, is the sole responsibility of the user. Printed in the U.S.A.

Index Property	Test Method	Typical	
Thickness	ASTM D6525	0.75 in.	(19 mm)
Mass/Unit Area	ASTM D6566	2.00 lbs/sy	(10 kg/sm)
Tensile Strength – MD	ASTM D6818	606 lbs/ft	(9.0 kN/m)
Tensile Strength – TD	ASTM D6818	625 lbs/ft	(9.25 kN/m)
Elongation - MD	ASTM D6818	100%	
Elongation – TD	ASTM D6818	125%	
UV Stability	ASTM D4355	90% @1000 hr	
Light Penetration	ASTM D6567	20%	
Biomass Improvement	ASTM D7322	240%	
Specific Gravity/Density	ASTM D792	1.63 oz/in ³	(1.5 g/cm ³)
Flexural Rigidity	ASTM D6575	1.97 in-lb	

Design Parameters			
TRM Underlayment		Unvegetated	Vegetated ³
SC250	Permissible Shear	7.5 psf	10.0 psf
	Velocity	18 fps	18 fps
C350	Permissible Shear	8.0 psf	12.0 psf
	Velocity	19 fps	20 fps
P550	Permissible Shear	8.5 psf	14.0 psf
	Velocity	19.5 fps	25 fps

NTPEP ASTM D6460 Large Scale Channel*	
Unvegetated Shear Stress	8.6 psf (412 Pa)
Vegetated Shear Stress	> 12.5 psf (599 Pa)
Unvegetated Velocity	19.5 fps (5.95 m/s)
Vegetated Velocity	> 26.0 fps (7.93 m/s)

* Testing conducted with ShoreMax installed over North American Green P550 Turf Reinforcement Mat

Rev. 4.2023

Scan for additional and updated product information, or [click here](#).





DISTRIBUTED BY:

ASP Enterprises, Quick Supply Co., Bowman Construction Supply & Cascade Geosynthetics are sister companies that serve customers from the Midwest, across the Rocky Mountains to the Pacific Northwest. Together we supply customers with a variety of environmental construction materials including erosion and sediment control, geosynthetics, stormwater management, drainage products, hardscapes and outdoor living, revegetation and soil amendments, waterproofing solutions and more.



We are full line distributors of environmental construction materials for all project types. Contact us for assistance with a project or a quote on products. From specification recommendations and project development to installation and completion, we're here to help with all of your site solution needs. Our warehouses are stocked with readily available inventory and we offer same and next-day deliveries.

ASP ENTERPRISES

aspent.com

salesasp@aspent.com

ST. LOUIS

1099 Cassens Industrial Ct.
St. Louis, MO 63026
636-343-4357

KANSAS CITY

5301 E 59th St.
Kansas City, MO 64130
816-554-1191

OMAHA

15263 Cooper St.
Omaha, NE 68138
402-861-8579

WICHITA

316-393-1554

WENTZVILLE

1906 E Service Rd. HWY 61 N
Wentzville, MO 63385
636-445-9090

QUICK SUPPLY CO.

quicksupplyco.com

salesquick@quicksupplyco.com

DES MOINES

6620 NW Toni Dr.
Des Moines, IA 50313
515-289-1271

BOWMAN CONSTRUCTION SUPPLY

bowmanconstructionsupply.com

salesbcs@bowmanconstructionsupply.com

DENVER

10801 E. 54th Ave.
Denver, CO 80239
303-696-8960

COLORADO SPRINGS

2445 Wayside Ct.
Colorado Springs, CO 80915
719-257-7840

LOVELAND

4495 Woods Ave.
Loveland, CO 80538
970-535-0863

CASCADE GEOSYNTHETICS

cascadageos.com

salescascade@cascadageos.com

PORTLAND

3610 N. Suttle Rd. Bldg B
Portland, OR 97217
971-339-1020

SALT LAKE CITY

425 N. Neil Armstrong Rd.
Salt Lake City, UT 84116
435-276-0820

**GEOSYNTHETICS | EROSION CONTROL | STORMWATER MANAGEMENT
REVEGETATION & SOIL AMENDMENTS | SEDIMENT CONTROL | HARDSCAPES**