

LINEO™ DIMENSIONAL STONE

UNILOCK®

TECH SHEET


THICKNESS 100MM

REGION CHICAGO



APPLICATIONS

Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.

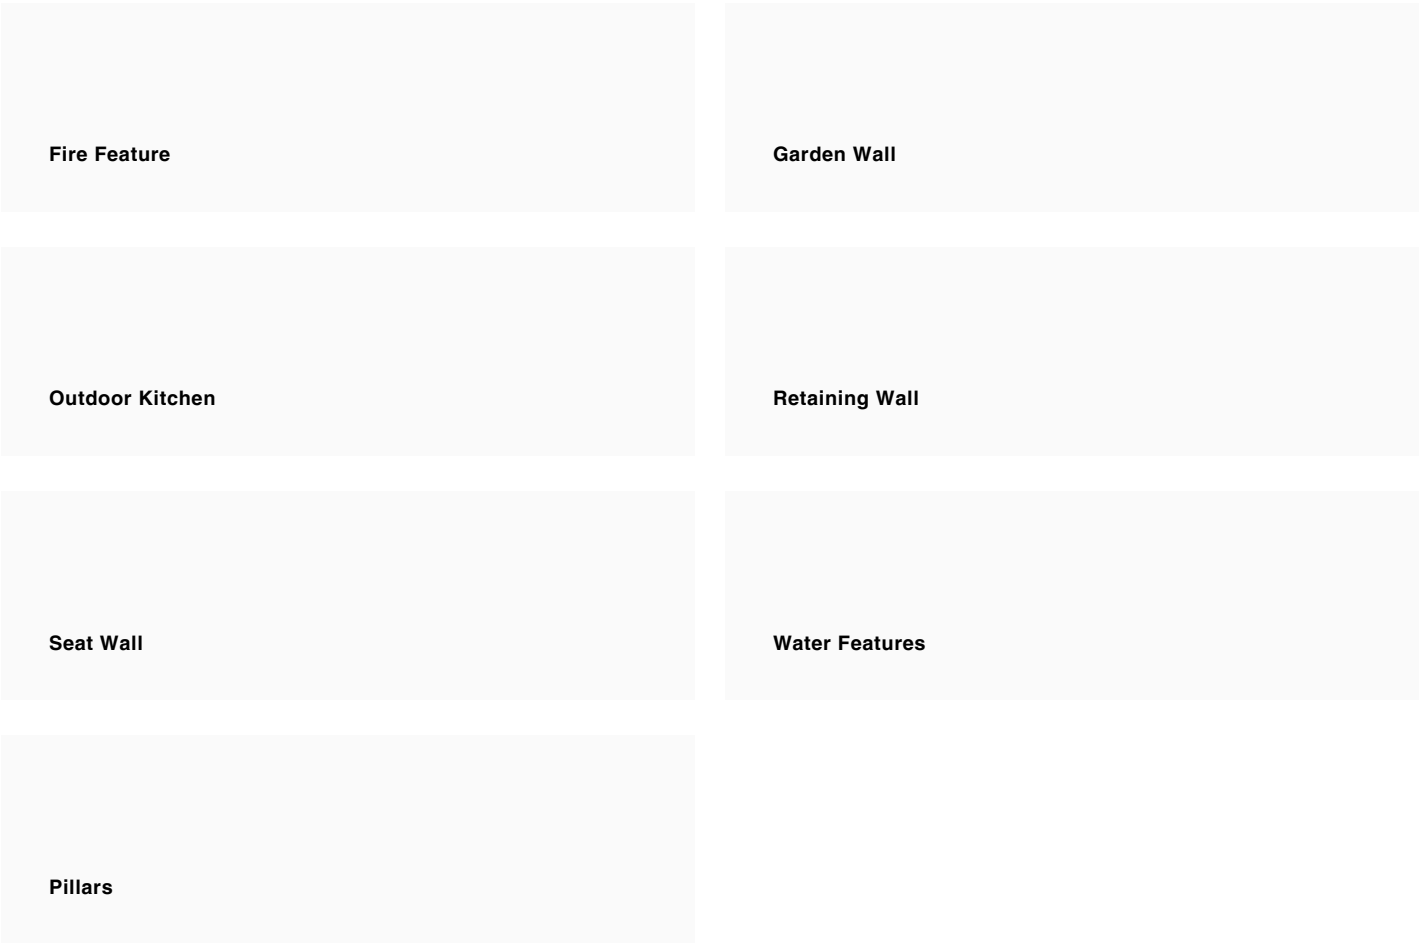

COLORS

RIVER
FINISH: CLASSIC

LARGE RECTANGLE
500mm x 100mm x 200mm
19 3/4" x 3 7/8" x 7 7/8"

RECTANGLE
400mm x 100mm x 200mm
15 3/4" x 3 7/8" x 7 7/8"

SMALL RECTANGLE
300mm x 100mm x 200mm
11 7/8" x 3 7/8" x 7 7/8"

XL RECTANGLE
600mm x 100mm x 200mm
23 5/8" x 3 7/8" x 7 7/8"

GRANITE
FINISH: CLASSIC

XL RECTANGLE
600mm x 100mm x 200mm
23 5/8" x 3 7/8" x 7 7/8"

LARGE RECTANGLE
500mm x 100mm x 200mm
19 3/4" x 3 7/8" x 7 7/8"

RECTANGLE
400mm x 100mm x 200mm
15 3/4" x 3 7/8" x 7 7/8"

SMALL RECTANGLE
300mm x 100mm x 200mm
11 7/8" x 3 7/8" x 7 7/8"

SIERRA
FINISH: CLASSIC

XL RECTANGLE
600mm x 100mm x 200mm
23 5/8" x 3 7/8" x 7 7/8"

LARGE RECTANGLE
500mm x 100mm x 200mm
19 3/4" x 3 7/8" x 7 7/8"

RECTANGLE
400mm x 100mm x 200mm
15 3/4" x 3 7/8" x 7 7/8"

SMALL RECTANGLE
300mm x 100mm x 200mm
11 7/8" x 3 7/8" x 7 7/8"

GRAPHITE
FINISH: CLASSIC

LARGE RECTANGLE
500mm x 100mm x 200mm
19 3/4" x 3 7/8" x 7 7/8"

RECTANGLE
400mm x 100mm x 200mm
15 3/4" x 3 7/8" x 7 7/8"

SMALL RECTANGLE
300mm x 100mm x 200mm
11 7/8" x 3 7/8" x 7 7/8"

XL RECTANGLE
600mm x 100mm x 200mm
23 5/8" x 3 7/8" x 7 7/8"

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

PACKAGING

	(100) RANDOM RANDOM BUNDLE	PILLAR UNIT
UNIT THICKNESS (MM)	100	100
LAYERS PER BUNDLE	3	3
FCFT PER BUNDLE	31.91	29.97
FCFT PER LAYER	10.64	9.99
FCFT PER UNIT	0.51	0.33
UNITS PER BUNDLE	63	90
UNITS PER LAYER	21	30
LBS PER BUNDLE	2,845	2,670
LBS PER LAYER	948.33	890
LBS PER UNIT	45.16	29.67

INSTALLATION NOTES

Lineo Dimensional Stone is a modern version of the well known Brussels Dimensional Stone family. Lineo is the un-tumbled version with uniquely modern features.

Applications – Design and build projects such as planters, steps, grill islands, pillars, seat walls and water features. Recommended for straight applications only.

Capacity – walls up to 2 ft. (60 cm) in height and hardscape features up to 4 ft. (1.2m)

Recommended Base Stabilization – one layer of DriveGrid™ stabilization grid between subgrade and base material. Use under Standard Base or Permeable Base.

Standard Base – Min. 6" – 8" of ¾" Crusher Run gravel (any road base standard in accordance with ASTM-D2940) compacted to 98% Standard Proctor Density (SPD).

Alternative Permeable Base – Min. 6" – 8" of ¾" clear open-graded stone compacted to achieve full particle lock-up and consolidation. (Clear open-graded does not compact but does consolidate slightly by rattling the particles together).

Leveling – Leveling retaining wall blocks directly on top of gravel is tedious and generally does not yield the best results. U-Grip Base units or universal base pads are recommended under all Unilock walls for improved accuracy and speedier installation. Additional benefits include long term structural integrity and an overall better appearance. Poured concrete leveling pads, reinforced with rebar, are also a great way to accomplish leveling, particularly for larger installations. You must ensure that the concrete is poured and finished perfectly in order to achieve a good visual appearance.

Connection – Lineo has small spacer strips that are placed between the blocks during construction to create a 3/16" (4mm) gap between units. Lineo relies on a concrete adhesive for connection between units. In order to make a connection between blocks, the adhesive must be "mounded" higher than 3/16" (4mm) in evenly spaced blobs so that it adheres the units together. Always read adhesive manufacturers' directions prior to gluing.

Handling – Handle carefully so you don't chip the nice crisp edges.

Coping - This wall does not require coping, but coping is generally used to complete the installation visually. Choose a manufactured coping such as Unilock Universal Coping or any of our natural stone coping options. Install with tight joints or 3/16" gap between units and amend with an exterior latex caulking. Cutting may be required; a diamond blade saw is required to cut coping properly. Glue all coping using a specially formulated concrete adhesive that is strong and will not break down over time. Always read adhesive manufacturers' directions prior to gluing.

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated September 25, 2025, 10:23 am



Bowman
Construction
Supply Inc.



Quick
Supply Co.



Cascade
GEOSYNTHETICS

LOCATIONS & CONTACT INFO

ASP ENTERPRISES

aspent.com
salesasp@aspent.com

BOWMAN CONSTRUCTION SUPPLY

bowmanconstructionsupply.com
salesbcs@bowmanconstructionsupply.com

QUICK SUPPLY CO.

quicksupplyco.com
salesquick@quicksupplyco.com

CASCADE GEOSYNTHETICS

cascadegeos.com
salescascade@cascadegeos.com

St. Louis, MO 636.343.4357
Omaha, NE 402.861.8579
Kansas City, MO 816.554.1191
Wichita, KS 316.393.1554

Denver, CO 303.696.8960
Colorado Springs, CO 719.257.7840
Loveland, CO 970.535.0863

Des Moines, IA
515.289.1271

Portland, OR
971.339.1020

SOLUTIONS WE SUPPLY

GEOSYNTHETICS

Filter Fabrics

Stabilization Fabrics

Geogrids

- Road Grids
- Wall Grids
- Slope Stabilization

Specialty Fabrics

Composite Geomembranes

- GCLs, PVC, HDPE, LLDPE, EPDM, Granular Bentonite

SEDIMENT CONTROL

Inlet Protection

- Grated Inlet, Curb Inlet, Area Inlet Protection

Ditch Checks

- Triangle Silt Dike
- GeoRidge

Perimeter Protection

- High and Low-Porosity Silt Fence, Straw Wattles, Silt Socks
- Safety Fence

Flocculants & Water Treatment

- Polymer-Based & Natural Flocculants

Sediment Basin Skimmers

Dewatering Bags

Trackout Control

- FODS
- Rumble Grates

Turbidity Curtains

EROSION CONTROL

Basic Hydraulically Applied Mulches

- Wood
- Paper
- Blends
- Straw

High-Performance Hydraulically

Applied Products

- BFM
- FGM
- Additives & Tackifiers

Temporary Erosion Control Blankets

- Coir & Jute Mat/Nettings
- Short-Term ECBs
- Extended-Term ECBs

Permanent Erosion Control Blankets

- Turf Reinforcement Mats
- HP-TRMs
- Anchor Reinforced Vegetation System

Structural BMPs

- Transition Mats
- Geoweb Cellular Confinement
- Composite Vegetated Armor System
- Flex MSE Vegetated Wall System
- Articulated Concrete Block
- Gabions
- Grout-Filled Geotextile Mats

Vegetation Establishment

- Native Seed & Turf Seed
- Fertilizers
- Organic Soil Additives
- Stratavault Soil Cells

STORMWATER MANAGEMENT

Water Quality

- Inlet Filter Boxes
- Pre-Treatment Chamber
- Nutrient Separating Baffle Boxes
- High-Flow Biofiltration Media
- Hydrodynamic Separators
- Stratavault

Water Quantity

- Modular Underground Storage Systems
- Chamber Detention Systems

Drainage

- HDPE Swale Liner
- Pipe & Fittings
- Drainage Composites
- Strip Drain

Inlet Structures

- PVC
- Drain Basins, In-Line Drains
- Landscape

Permeable Pavers

- Permeable Articulating Concrete Block
- Grass Pavers
- Gravel Pavers
- Concrete Pavers

SPECIALTY

Natural & Synthetic Coir Fiber Logs

Vegetated Reinforced Soil Slopes

Soil Anchors

Root Barrier System

AquaBlok

Muscle Wall

We are full line distributors of construction materials for all project types. Contact us for assistance with a project. From specification and development to installation and completion, we're here to help with all of your site solution needs.

**GEOSYNTHETICS | EROSION CONTROL | STORMWATER MANAGEMENT
SEDIMENT CONTROL | REVEGETATION & SOIL AMENDMENTS**