


MATERIAL PROPERTY DATA SHEET



F120-S-Z SERIES

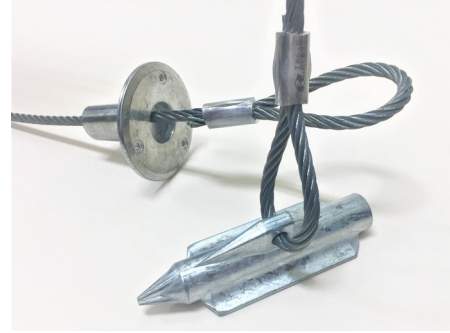

DESCRIPTION

Falcon Percussion Driven Anchors (PDAs) are designed to provide drive efficiency and maximize load capability across a wide range of applications. The F120-S-Z assembly consists of a top plate with one-way wire grip, tethered to a deep-seat earth anchor. Once the anchor is driven into the ground, typically 6 feet (1.8 m), the top plate is secured to the ground and held fast, holding an HPTRM or structure firmly in place. The anchor and top plate of the F120-S-Z are cast in the USA. The assembly is fabricated in the USA. The F120-S-Z assembly allows for re-tensioning, negated the need for time consuming cable crimping and comes fully assembled.

Typical Pullout Resistance*		
Soil Type	Install Depth	
		3 ft
Loose (SPT > 4)	300	450
Medium (SPT > 10)	750	1,250
Dense (SPT > 30)	1,750	3,250
Very Dense (SPT > 50)	3,250	> 5,000

System Performance	
Typical Anchor Load*	2,500 lbs
Maximum Working Load	2,700 lbs
Ultimate Assembly Strength	3,000 lbs
Ultimate Cable Strength	7,000 lbs

Disclaimer: The information contained herein may represent product index data, performance ratings, bench scale testing or other material utility quantifications. Each representation may have unique utility and limitations. Every effort has been made to ensure accuracy, however, no warranty is claimed and no liability shall be assumed by Western Green or its affiliates regarding the completeness, accuracy or fitness of these values for any particular application or interpretation. While testing methods are provided for reference, values shown may be derived from interpolation or adjustment to be representative of intended use. For further information, please feel free to contact Western Green.

©2022, Falcon Anchors is a registered trademark from Western Green. Certain products and/or applications described or illustrated herein are protected under one or more U.S. patents. Other U.S. patents are pending, and certain foreign patents and patent applications may also exist. Trademark rights also apply as indicated herein. Final determination of the suitability of any information or material for the use contemplated, and its manner of use, is the sole responsibility of the user. Printed in the U.S.A.

Assembly Components†		Physical Properties
Top Plate	Zinc-Aluminum alloy	Diameter: 4.0" (100 mm) Thickness: 0.11" (2.8 mm)
Grip	Spring-loaded crush roller	Ceramic
Cable	Zinc-Aluminum coated steel	Diameter: 1/4" (6.35 mm)
Anchor	Zinc-Aluminum alloy	4.7 L x 1.6 W x 1.3 H inches (120 L x 40 W x 32 H mm) Bearing Area: 6.0 in ² (39 cm ²)
Length	Varies	F120-S-Z3: 3 ft (0.9 m) F120-S-Z6: 6 ft (1.8 m) F120-S-Z9: 9 ft (2.7 m)

Typical Use	
Upgraded strength, light duty assembly for soft soils used for solar foundation anchoring	

* Soil dependent value.

† Assembly is shown as standard configuration. Cable lengths and other components may be customized as required.





DISTRIBUTED BY:

ASP Enterprises, Quick Supply Co., Bowman Construction Supply & Cascade Geosynthetics are sister companies that serve customers from the Midwest, across the Rocky Mountains to the Pacific Northwest. Together we supply customers with a variety of environmental construction materials including erosion and sediment control, geosynthetics, stormwater management, drainage products, hardscapes and outdoor living, revegetation and soil amendments, waterproofing solutions and more.



We are full line distributors of environmental construction materials for all project types. Contact us for assistance with a project or a quote on products. From specification recommendations and project development to installation and completion, we're here to help with all of your site solution needs. Our warehouses are stocked with readily available inventory and we offer same and next-day deliveries.

ASP ENTERPRISES

aspent.com

salesasp@aspent.com

ST. LOUIS

1099 Cassens Industrial Ct.
St. Louis, MO 63026
636-343-4357

KANSAS CITY

5301 E 59th St.
Kansas City, MO 64130
816-554-1191

OMAHA

15263 Cooper St.
Omaha, NE 68138
402-861-8579

WICHITA

316-393-1554

WENTZVILLE

1906 E Service Rd. HWY 61 N
Wentzville, MO 63385
636-445-9090

QUICK SUPPLY CO.

quicksupplyco.com

salesquick@quicksupplyco.com

DES MOINES

6620 NW Toni Dr.
Des Moines, IA 50313
515-289-1271

BOWMAN CONSTRUCTION SUPPLY

bowmanconstructionsupply.com

salesbcs@bowmanconstructionsupply.com

DENVER

10801 E. 54th Ave.
Denver, CO 80239
303-696-8960

COLORADO SPRINGS

2445 Wayside Ct.
Colorado Springs, CO 80915
719-257-7840

LOVELAND

4495 Woods Ave.
Loveland, CO 80538
970-535-0863

CASCADE GEOSYNTHETICS

cascadageos.com

salescascade@cascadageos.com

PORTLAND

3610 N. Suttle Rd. Bldg B
Portland, OR 97217
971-339-1020

SALT LAKE CITY

425 N. Neil Armstrong Rd.
Salt Lake City, UT 84116
435-276-0820

**GEOSYNTHETICS | EROSION CONTROL | STORMWATER MANAGEMENT
REVEGETATION & SOIL AMENDMENTS | SEDIMENT CONTROL | HARDSCAPES**