

TYPE 1 DOT TURBIDITY CURTAIN

SPECIFICATION SHEET

Product Summary

BMP Supplies Type 1 DOT Turbidity Curtains are manufactured to meet DOT approvals for curtains to be deployed in water with little to no flow rates. This type of site may include ponds, shallow lakes, small streams and marshes.

Contact Details

bmpsupplies.com
sales@bmpsupplies.com
1.855.422.0066

Curtain Warehouse


321 - 18st S.E.
Calgary, AB, T2E 6J5
Canada

Float Fabric	18oz PVC
Body Fabric	18oz PVC
End Treatment	#2 Grommet every 6" at center
Section Size	50' Length x 2.5-15' Depth (custom sizes available)
Floatation	6" x 6" x 88" EPS Foam
Net Buoyancy	15+ lbs per foot
Ballast	5/16" Steel Chain
Ballast Chain Connection	5/16" Quick Connector
Connection Between Sections	Weather Resistant Zip Ties

The information contained herein is furnished without charge or obligation and the recipient assumes all responsibility for its use. Because conditions of use and handling may vary and are beyond our control, we make no representation about, and are not responsible or liable for the accuracy and reliability of said information or the performance of any product. Any specification, property or application listed herein are provided as information only and in no way modify, amend, enlarge or create any warranty. Nothing contained herein is to be construed as permission or as a recommendation to infringe any patent.

TYPE 1 DOT TURBIDITY CURTAIN

PRODUCT DIAGRAM

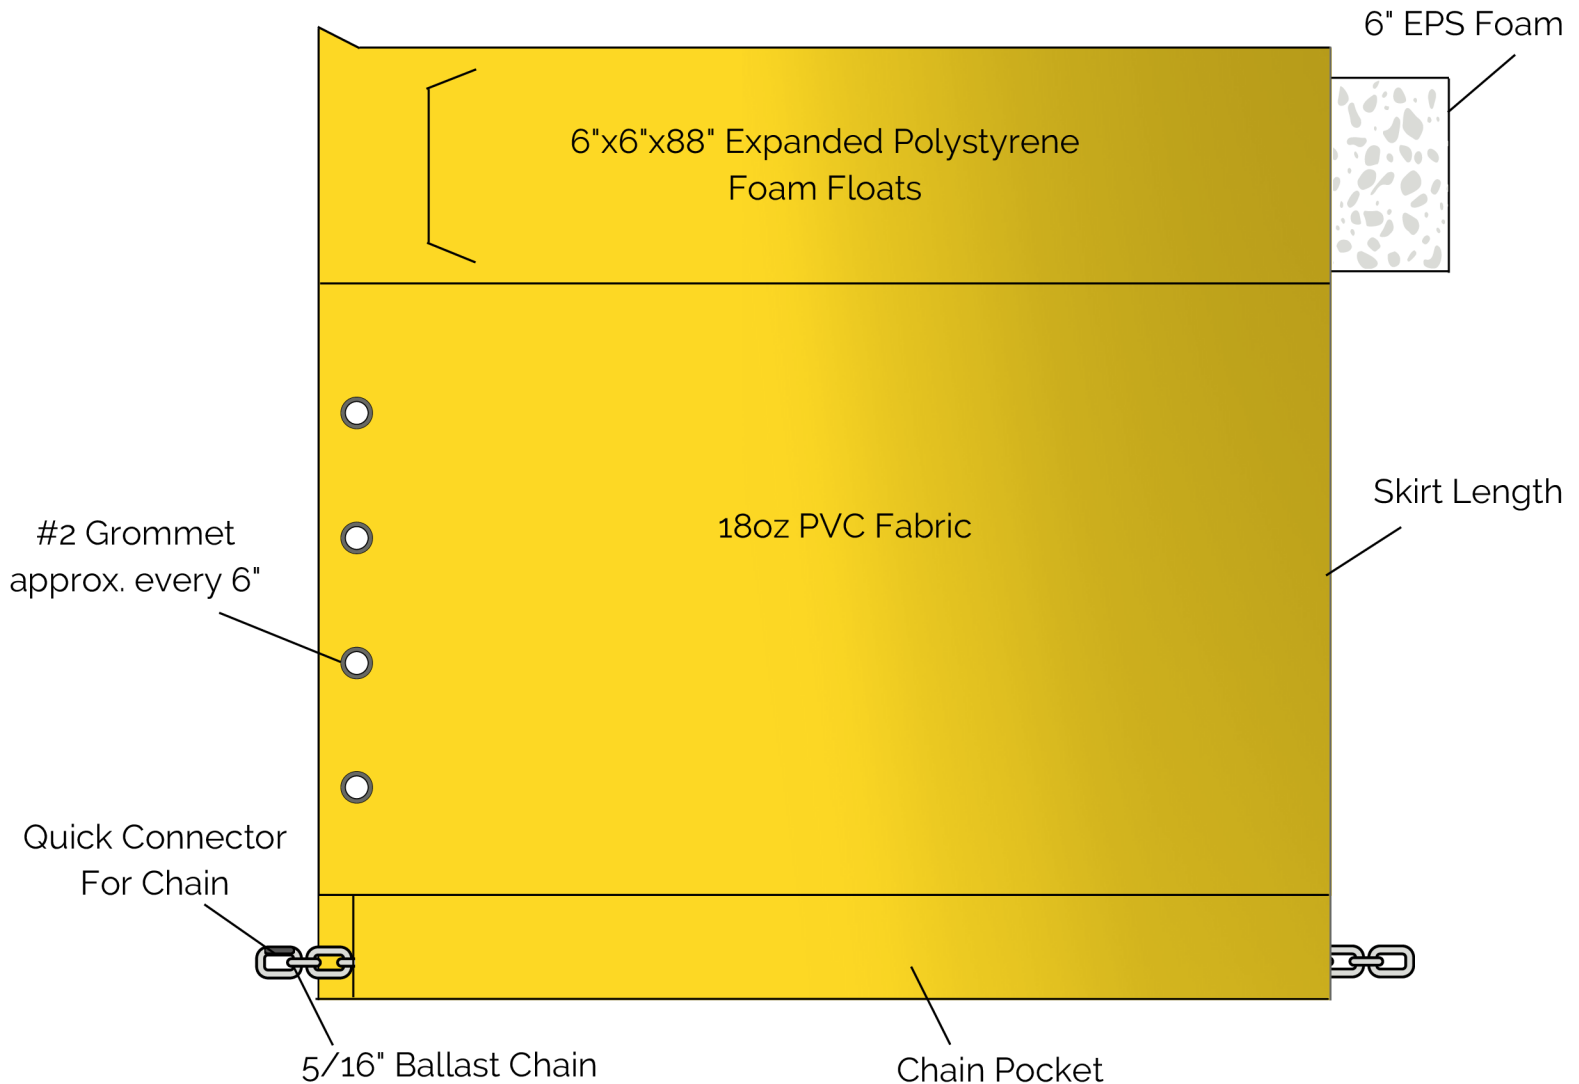

The information contained herein is furnished without charge or obligation and the recipient assumes all responsibility for its use. Because conditions of use and handling may vary and are beyond our control, we make no representation about, and are not responsible or liable for the accuracy and reliability of said information or the performance of any product. Any specification, property or application listed herein are provided as information only and in no way modify, amend, enlarge or create any warranty. Nothing contained herein is to be construed as permission or as a recommendation to infringe any patent.



DISTRIBUTED BY:

ASP Enterprises, Quick Supply Co., Bowman Construction Supply & Cascade Geosynthetics are sister companies that serve customers from the Midwest, across the Rocky Mountains to the Pacific Northwest. Together we supply customers with a variety of environmental construction materials including erosion and sediment control, geosynthetics, stormwater management, drainage products, hardscapes and outdoor living, revegetation and soil amendments, waterproofing solutions and more.



We are full line distributors of environmental construction materials for all project types. Contact us for assistance with a project or a quote on products. From specification recommendations and project development to installation and completion, we're here to help with all of your site solution needs. Our warehouses are stocked with readily available inventory and we offer same and next-day deliveries.

ASP ENTERPRISES

aspent.com

salesasp@aspent.com

ST. LOUIS

1099 Cassens Industrial Ct.
St. Louis, MO 63026
636-343-4357

KANSAS CITY

5301 E 59th St.
Kansas City, MO 64130
816-554-1191

OMAHA

15263 Cooper St.
Omaha, NE 68138
402-861-8579

WICHITA

316-393-1554

WENTZVILLE

1906 E Service Rd. HWY 61 N
Wentzville, MO 63385
636-445-9090

QUICK SUPPLY CO.

quicksupplyco.com

salesquick@quicksupplyco.com

DES MOINES

6620 NW Toni Dr.
Des Moines, IA 50313
515-289-1271

BOWMAN CONSTRUCTION SUPPLY

bowmanconstructionsupply.com

salesbcs@bowmanconstructionsupply.com

DENVER

10801 E. 54th Ave.
Denver, CO 80239
303-696-8960

COLORADO SPRINGS

2445 Wayside Ct.
Colorado Springs, CO 80915
719-257-7840

LOVELAND

4495 Woods Ave.
Loveland, CO 80538
970-535-0863

CASCADE GEOSYNTHETICS

cascadageos.com

salescascade@cascadageos.com

PORTLAND

3610 N. Suttle Rd. Bldg B
Portland, OR 97217
971-339-1020

SALT LAKE CITY

425 N. Neil Armstrong Rd.
Salt Lake City, UT 84116
435-276-0820

**GEOSYNTHETICS | EROSION CONTROL | STORMWATER MANAGEMENT
REVEGETATION & SOIL AMENDMENTS | SEDIMENT CONTROL | HARDSCAPES**