

Small Diameter N-12[®] Pipe and Fittings



Small Diameter N-12 Pipe and Fittings

ADS offers a line of 4"-12" (100-300 mm) corrugated smooth interior high-density polyethylene (HDPE) pipe and injection molded fittings for maximum drainage service integrity. This means that the performance and cost-effective benefits of HDPE pipe can be used in a complete 4"-60" (100-1500 mm) system.

The Advantages of Polyethylene

- **Better Impact Strength**
HDPE is less brittle than PVC, particularly in cold temperatures. N-12 survives the impact of rocks in the backfill and the rigors of cold weather handling.
- **No Edge Beveling**
N-12 pipe installs quickly because there is no need to bevel the pipe edge when making a joint.
- **Better Chemical & Abrasion Resistance**
HDPE is unaffected by acidic and alkaline solutions as well as by soil hydrocarbons.
- H-20 Traffic Load Rated
- Increased Pipe Stiffness

Applications

Small diameter N-12 makes possible a complete drainage system from the top of the building to the storm sewer including:

- Roof drains
- Foundation lines
- Collector pipe
- Roadway edge drains
- Construction site dewatering

Readily Available


Watertight Performance

N-12 WT pipe and fittings meet or exceed watertight requirements of ASTM D3212 – the standard for ALL thermoplastic gravity flow pipes including PVC. To assure watertightness, field performance verification may be accomplished by testing in accordance with ASTM F1417.


Published Pipe Stiffness Values		
ID	N-12	PVC SDR 35
4" (100 mm)	50 pii (345 kPa)	46 pii (320 kPa)
6" (150 mm)	50 pii (345 kPa)	46 pii (320 kPa)
8" (200 mm)	50 pii (345 kPa)	46 pii (320 kPa)
10" (250 mm)	50 pii (345 kPa)	46 pii (320 kPa)
12" (300 mm)	50 pii (345 kPa)	46 pii (320 kPa)

Applicable Specifications

- Uniform Plumbing Code (UPC) – “Subsoil Drains” under Chapter 11, Storm Drainage. See Section 1101.4.6 Subsoil Drains, Table 1101.4.6 in image of 2018 standard.
- International Code Council’s (ICC), International Plumbing Code (IPC): 2018 Update – Table 1102.4
- AASHTO M252 - 3"-10" (75 to 250 mm) Corrugated Polyethylene Drainage Pipe
- AASHTO M294 - 12"-60" (300 to 1500 mm) Corrugated Polyethylene Pipe
- ASTM F2648 - 2"-60" (50 to 1500 mm) Annular Corrugated Profile Wall PE Pipe and Fittings for Land Drainage
- ASTM F667 - 3"-24" (75 to 600 mm) Corrugated Polyethylene Pipe and Fittings
- CSA B182.8 - 4"-60" (100 to 1500 mm) Profile Polyethylene (PE) Storm Sewer and Drainage Pipe and Fittings



N-12® WT



Mega Green® WT



Nyloplast® Universal
Inline Drain



OneFit Inserta Tee®

Watertight Fittings (Includes ASTM F477 gasket for attachment on pipe end)

COUPLER, BELL/BELL



Size	Code
4" (100 mm)	0413WT
6" (150 mm)	0613WT
8" (200 mm)	0813WT
10" (250 mm)	1013WT

REDUCING COUPLER, BELL/BELL



Size	Code
6" x 4" (150 x 100 mm)	0614WT
8" x 4" (200 x 100 mm)	0814WT
8" x 6" (200 x 150 mm)	0816WT
10" x 8" (250 x 200 mm)	1018WT
12" x 8" (300 x 200 mm)	1218WT
12" x 10" (300 x 250 mm)	1210WT

REDUCING COUPLER, SPIGOT/BELL



Size	Code
6" x 4" (150 x 100 mm)	0674WT
8" x 4" (200 x 100 mm)	0874WT
8" x 6" (200 x 150 mm)	0876WT

END CAP, BELL



Size	Code
4" (100 mm)	0432WT
6" (150 mm)	0632WT

TEE, BELL/BELL



Size	Code
4" (100 mm)	0460WT
6" x 4" (150 x 100 mm)	0660WT
6" (150 mm)	0661WT
8" (200 mm)	0862WT
10" x 4" (250 x 100 mm)	1060WT*
10" x 8" (250 x 200 mm)	1062WT
10" (250 mm)	1063WT
12" x 4" (300 x 100 mm)	1260WT*
12" x 8" (300 x 200 mm)	1262WT
12" x 10" (300 x 250 mm)	1263WT*
12" (300 mm)	1264WT

SWEEPING TEE



Size	Code
8" x 4" (200 x 100 mm)	0863WT
8" x 6" (200 x 150 mm)	0836WT
10" x 6" (250 x 150 mm)	1036WT
12" x 6" (300 x 150 mm)	1236WT

45° ELBOW, BELL/BELL



Size	Code
4" (100 mm)	0494WT
6" (150 mm)	0694WT
8" (200 mm)	0894WT
10" (250 mm)	1094WT
12" (300 mm)	1294WT

45° WYE, BELL/BELL



Size	Code
4" (100 mm)	0480WT
6" x 4" (150 x 100 mm)	0680WT
6" (150 mm)	0681WT
8" x 4" (200 x 100 mm)	0880WT
8" x 6" (200 x 150 mm)	0881WT
8" (200 mm)	0882WT
10" x 4" (250 x 100 mm)	1080WT*
10" x 6" (250 x 150 mm)	1081WT*
10" x 8" (250 x 200 mm)	1082WT
10" (250 mm)	1083WT
12" x 4" (300 x 100 mm)	1280WT*
12" x 6" (300 x 150 mm)	1281WT
12" x 8" (300 x 200 mm)	1282WT
12" x 10" (300 x 250 mm)	1283WT*
12" (300 mm)	1284WT

90° ELBOW, BELL/BELL



Size	Code
4" (100mm)	0499WT
6" (150mm)	0699WT
8" (200mm)	0899WT
10" (250mm)	1099WT
12" (300mm)	1299WT

* See Watertight fitting kits notes below

Watertight Fitting Kit



Tee Size	Consists of Tee + Reducer	Prod. Code
Tee, 10" x 4" (250 mm x 100 mm)	1062WT 10" x 8" + 0874WT 8" x 4"	1060WT
Tee, 12" x 4" (300 mm x 100 mm)	1262WT 12" x 8" + 0874WT 8" x 4"	1260WT
Tee, 12" x 10" (300 mm x 250 mm)	1264WT 12" + 1210WT 12" x 10"	1263WT ^{1,2}

Wye Size	Consists of Wye + Reducer	Prod. Code
Wye, 10" x 4" (250 mm x 100 mm)	1082WT 10" x 8" + 0874WT 8" x 4"	1080WT
Wye, 10" x 6" (250 mm x 150 mm)	1082WT 10" x 8" + 0876WT 8" x 6"	1081WT
Wye, 12" x 4" (300 mm x 100 mm)	1282WT 12" x 8" + 0874WT 8" x 4"	1280WT
Wye, 12" x 10" (300 mm x 250 mm)	1284WT 12" + 1210WT 12" x 10"	1283WT ³

¹ Additional pipe stub not shipped with item number. Order this pipe separately.

² 12" x 10" Tee: order 1264 (WT or ST) 12" x 12" Tee, 1210WT 12" x 10" Bell/Bell Reducer, and approximately 15" of 12" diameter dual wall pipe to make the connection between the two bell ends.


³ 12" x 10" Wye: order 1284 (WT or ST) 12" x 12" Wye, 1210WT 12" x 10" Bell/Bell Reducer, and approximately 15" of 12" diameter dual wall pipe to make the connection between the two bell ends.



Additional Connection Options

Besides injection molded HDPE fittings, ADS offers a full line of products to make your small diameter pipe connections watertight, fast, and economical. Nyloplast provides a complete offering of PVC fittings, including downspout connections and cleanouts, that are adaptable to just about any pipe material including HDPE. Connections to the main pipelines of all diameters are also made easy with Inserta Tee to connect 4"-24" (100-600 mm) diameter lateral pipes.

Nyloplast Downspout Adapter with Clean Out and Inserta Tee

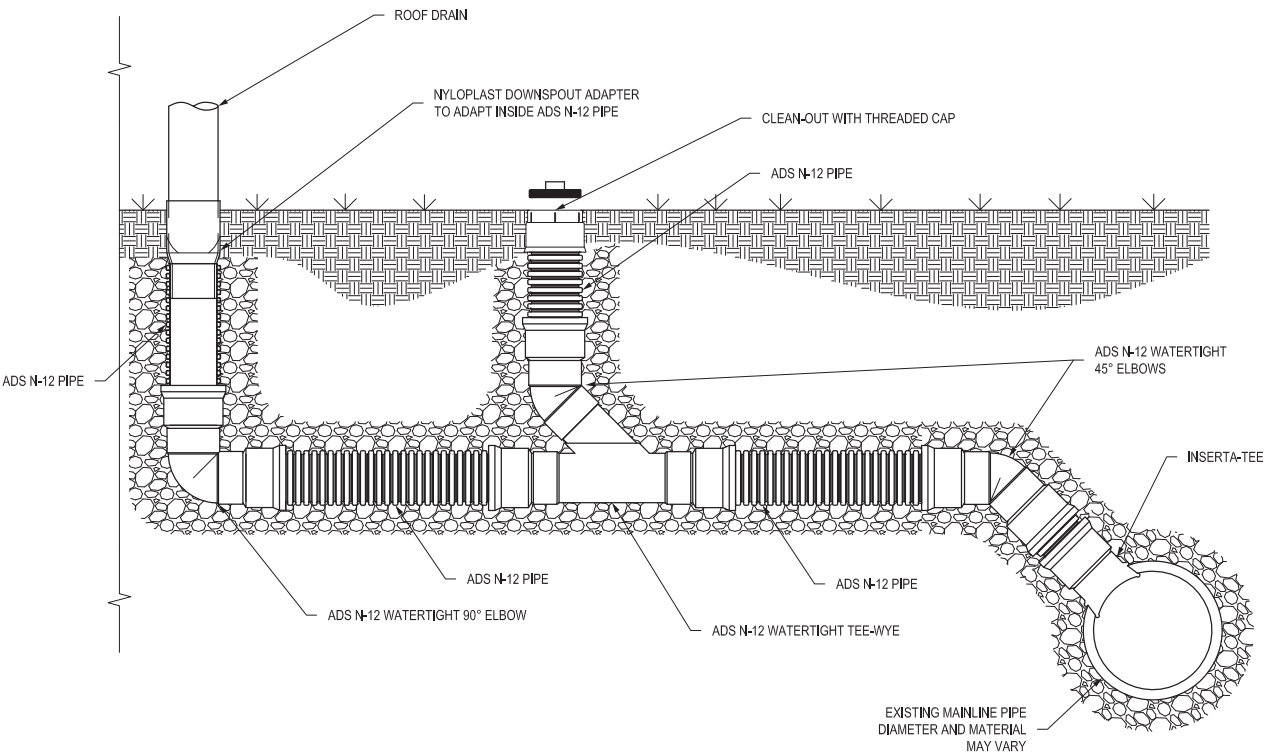

Inserta Tee Diameter

Mainline Pipe Diameter	4" (100 mm)	6" (150 mm)	8" (200 mm)
12-15" (300-375 mm)	4N12MF12-15N12	6N12MF12-15N12	8N12MF12-15N12
18-24" (450-600 mm)	4N12MF18-24N12	6N12MF18-24N12	8N12MF18-24N12
30-48" (750-1200 mm)	4N12MF30-48N12	6N12MF30-48N12	8N12MF30-48N12
54-60" (1350-1500 mm)	4N12MF54-60N12	6N12MF54-60N12	8N12MF54-60N12

Downspout Adapters

Product Description	Part Number
4x4x4" (100x100x100 mm)	0444FH
4x6x6" (100x150x150 mm)	0466FH
6x6x6" (150x150x150 mm)	0666FH
6x6x8" (150x150x200 mm)	0668FH
8x8x8" (200x200x200 mm)	0888FH

Clean outs

Product Description	Part Number
4" (100 mm)	0474AG
6" (150 mm)	0674AG
8" (200 mm)	0874AG
10" (250 mm)	1074AG
12" (300 mm)	1274AG

adspipe.com
800-821-6710

ADS "Terms and Conditions of Sale" are available on the ADS website, www.adspipe.com
The ADS logo, N-12®, Mega Green® and the Green Stripe are registered trademarks of Advanced Drainage Systems, Inc.
Inserta Tee® is a registered trademarks of Inserta Fittings company. Nyloplast® is a registered trademarks of Nyloplast, Inc.
LEED® and the Green Building Council Member logo are registered trademarks of the U.S. Green Building Council.
© 2023 Advanced Drainage Systems, Inc. #10484 4/23 CS





Bowman
Construction
Supply Inc.



Quick
Supply Co.



Cascade
GEOSYNTHETICS

LOCATIONS & CONTACT INFO

ASP ENTERPRISES

aspent.com
salesasp@aspent.com

BOWMAN CONSTRUCTION SUPPLY

bowmanconstructionsupply.com
salesbcs@bowmanconstructionsupply.com

QUICK SUPPLY CO.

quicksupplyco.com
salesquick@quicksupplyco.com

CASCADE GEOSYNTHETICS

cascadegeos.com
salescascade@cascadegeos.com

St. Louis, MO 636.343.4357
Omaha, NE 402.861.8579
Kansas City, MO 816.554.1191
Wichita, KS 316.393.1554

Denver, CO 303.696.8960
Colorado Springs, CO 719.257.7840
Loveland, CO 970.535.0863

Des Moines, IA
515.289.1271

Portland, OR
971.339.1020

SOLUTIONS WE SUPPLY

GEOSYNTHETICS

Filter Fabrics

Stabilization Fabrics

Geogrids

- Road Grids
- Wall Grids
- Slope Stabilization

Specialty Fabrics

Composite Geomembranes

- GCLs, PVC, HDPE, LLDPE, EPDM, Granular Bentonite

SEDIMENT CONTROL

Inlet Protection

- Grated Inlet, Curb Inlet, Area Inlet Protection

Ditch Checks

- Triangle Silt Dike
- GeoRidge

Perimeter Protection

- High and Low-Porosity Silt Fence, Straw Wattles, Silt Socks
- Safety Fence

Flocculants & Water Treatment

- Polymer-Based & Natural Flocculants

Sediment Basin Skimmers

Dewatering Bags

Trackout Control

- FODS
- Rumble Grates

Turbidity Curtains

EROSION CONTROL

Basic Hydraulically Applied Mulches

- Wood
- Paper
- Blends
- Straw

High-Performance Hydraulically

Applied Products

- BFM
- FGM
- Additives & Tackifiers

Temporary Erosion Control Blankets

- Coir & Jute Mat/Nettings
- Short-Term ECBs
- Extended-Term ECBs

Permanent Erosion Control Blankets

- Turf Reinforcement Mats
- HP-TRMs
- Anchor Reinforced Vegetation System

Structural BMPs

- Transition Mats
- Geoweb Cellular Confinement
- Composite Vegetated Armor System
- Flex MSE Vegetated Wall System
- Articulated Concrete Block
- Gabions
- Grout-Filled Geotextile Mats

Vegetation Establishment

- Native Seed & Turf Seed
- Fertilizers
- Organic Soil Additives
- Stratavault Soil Cells

STORMWATER MANAGEMENT

Water Quality

- Inlet Filter Boxes
- Pre-Treatment Chamber
- Nutrient Separating Baffle Boxes
- High-Flow Biofiltration Media
- Hydrodynamic Separators
- Stratavault

Water Quantity

- Modular Underground Storage Systems
- Chamber Detention Systems

Drainage

- HDPE Swale Liner
- Pipe & Fittings
- Drainage Composites
- Strip Drain

Inlet Structures

- PVC
- Drain Basins, In-Line Drains
- Landscape

Permeable Pavers

- Permeable Articulating Concrete Block
- Grass Pavers
- Gravel Pavers
- Concrete Pavers

SPECIALTY

Natural & Synthetic Coir Fiber Logs

Vegetated Reinforced Soil Slopes

Soil Anchors

Root Barrier System

AquaBlok

Muscle Wall

We are full line distributors of construction materials for all project types. Contact us for assistance with a project. From specification and development to installation and completion, we're here to help with all of your site solution needs.

GEOSYNTHETICS | EROSION CONTROL | STORMWATER MANAGEMENT
SEDIMENT CONTROL | REVEGETATION & SOIL AMENDMENTS